



IE2**TECHNICAL DATASHEET
3 PHASE INDUCTION MOTOR****kirloskar**
motors

Sr No	Parameter	Unit	Data
Product Specifications			
1	Rated Output	kW	37
2	Number of Poles	No	4
3	Frame Designation		KM225S
4	Product Code		KM2.37T0.BPC.B35.TSS
5	Mounting		B35
Electrical			
6	Type of Duty		Continuous S1
7	Rated Voltage	V	415 ±10%
8	Rated Frequency	Hz	50 ±5%
9	Rated Speed	RPM	1470
10	Rated Current	A	62
11	Method of Starting		Direct On Line
12	Starting Current (SCC)	% of FLA	650
13	Rated Torque	Kg-m	24.52
14	Starting Torque (STT)	% of FLT	225
15	Maximum Torque (POT)	% of FLT	275
16	Efficiency at 100% / 75% / 50% load	%	92.7 / 92.7 / 91.5
17	Power factor at 100% / 75% / 50% load		0.89 / 0.87 / 0.84
18	Thermal Withstand Time (Hot)	s	12
19	Thermal Withstand Time (Cold)	s	24
20	Thermal Time Constant (Stator)	min	60
21	Connection / Number of Terminals		Delta / 6
22	Permissible Starts/hour (Hot/Cold)	Nos	2/3
23	Insulation Class / Thermal Limit		F/B
24	Winding Treatment		VPI, Dual Coat Copper Wire
Mechanical			
25	Degree of Protection		IP55
26	Enclosure / MOC /Method of Cooling		TEFC / CI/ IC411
27	Bearing DE/NDE		6313ZZ C3/6312ZZ C3
28	Type of Coupling		Direct/Flexible
29	Noise Level		As per IS12065
30	Vibration Level		As per IS12075
31	Moment of Inertia GD ²	kg-m ²	1.94
32	Position of Terminal Box		TOP
33	Maximum Cable Size		2X3CX120 mm ²
34	Direction of Rotation		Bidirectional (Default: CW from DE)
35	Paint Shade		RAL 7046- Telegrey
36	Net weight	kg	330
37	Accessories		PTC 130 - 3 Nos (1 No / phase)
Enviromental			
38	Ambient Temperature /Temperature Rise	°C	50 / 70 (By resistance method)
39	Altitude Above MSL	m	≤ 1000
Notes: All performance data shall be subject to tolerances as per IS15999/IEC 60034. Applicable Standards:IS 12615-2018, IS 15999-1			
Customer		PO No./ Enq. No	
		Date	
Checked	BMD	13-12-2022	
Approved	SSN	13-12-2022	Document No: KM2-001 Rev.0
KIRLOSKAR OIL ENGINES LTD. ELECTRIC MOTORS			

PERFORMANCE CURVE

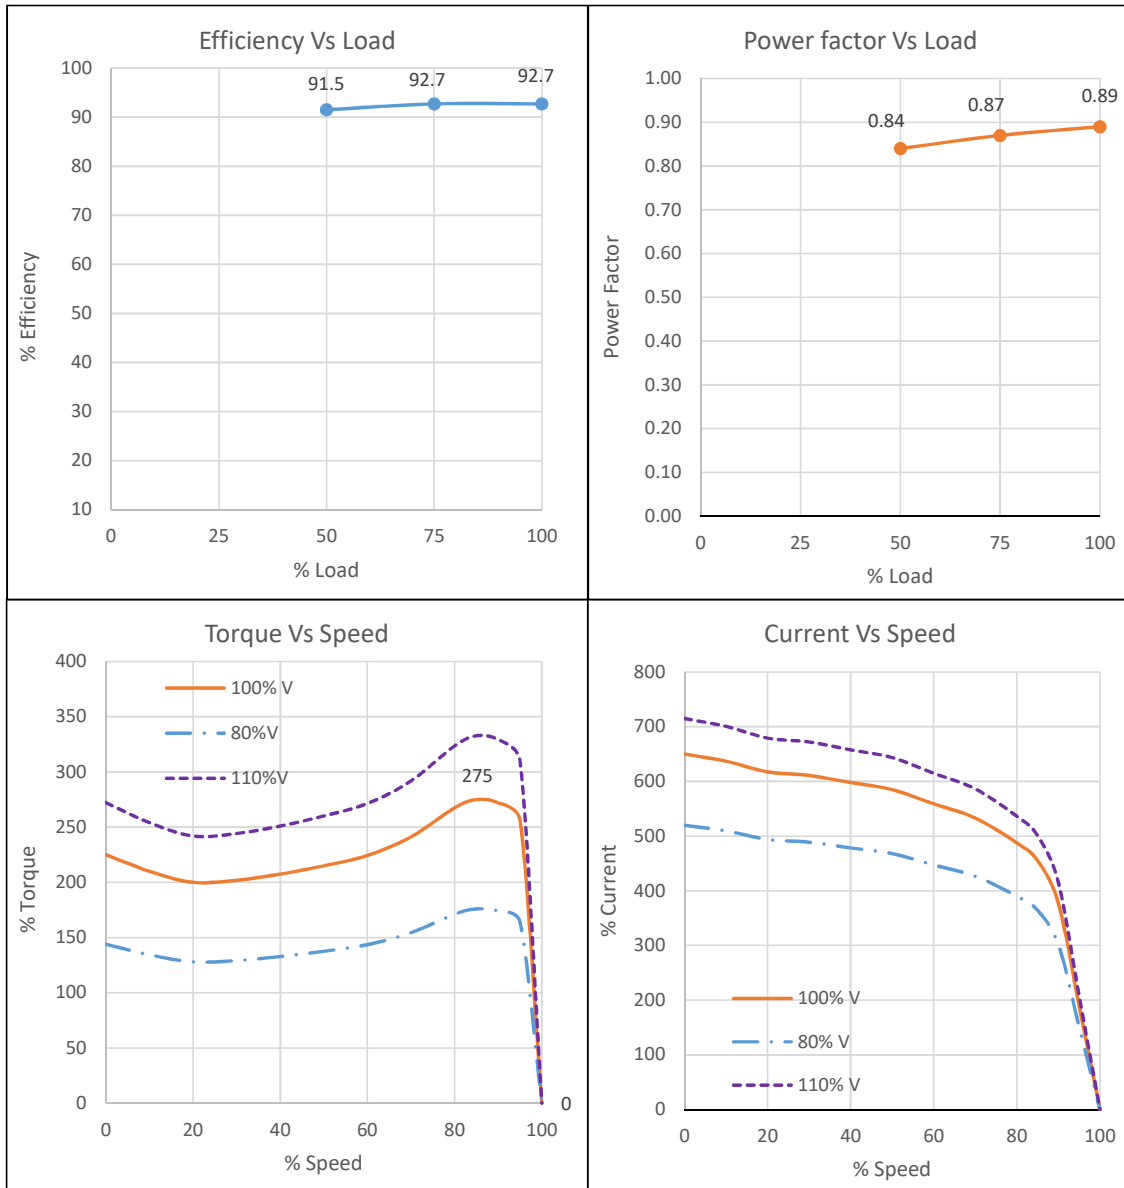


kW	37	Customer	
Pole	4	PO No / Enq. No	
Frame	KM225S	Date	
Mounting	B35	Product Code	KM2.37T0.BPC.B35.TSS
Checked	BMD	13-12-2022	
Approved	SSN	13-12-2022	Document No KM2-002 Rev. 0
KIRLOSKAR OIL ENGINES LTD.			
ELECTRIC MOTORS			



GENERAL ARRANGEMENT DRAWING FOR TEFC 3 PHASE INDUCTION MOTOR

kirloskar
motors

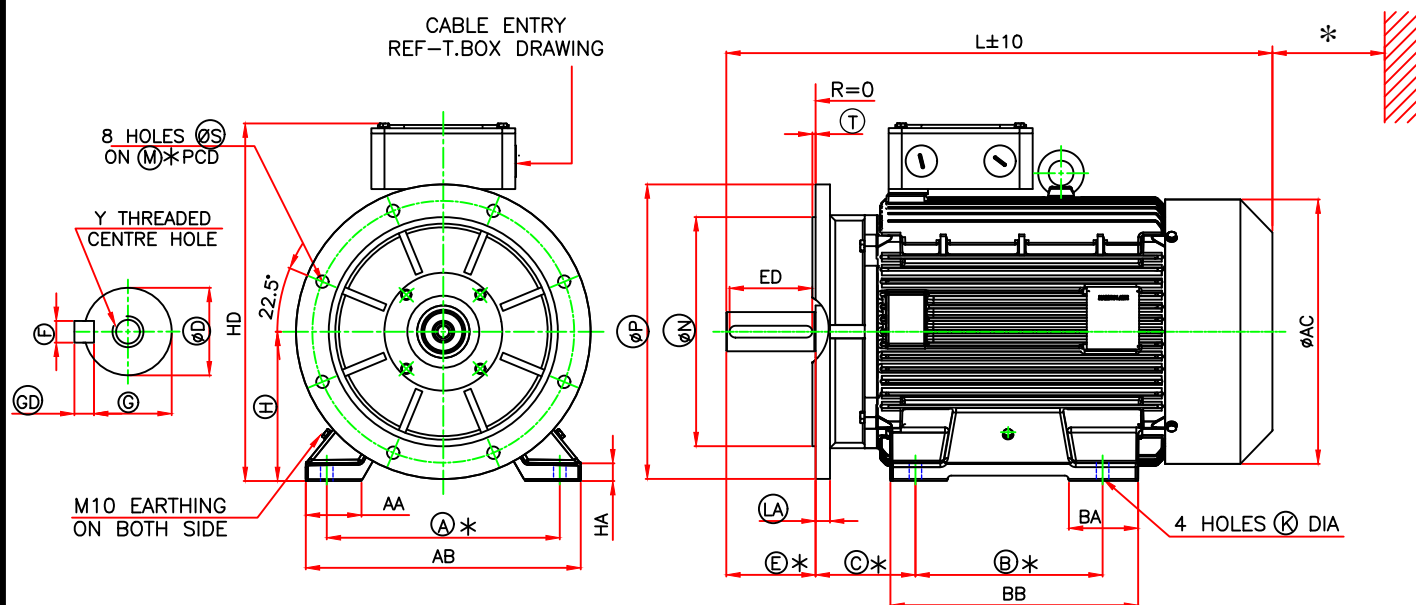

FRAME	FOOT FIXING									FLANGE FIXING					
	A	B	C	H TOL.	AA	AB	BA	BB	K TOL.	M Tol	N Tol	P	S	T	LA
KM225S	356	286	149	225/224.5	87	420	106	377	19/19.5	400	350.018/349.982	450	19	5	22

D END SHAFT EXTENSION AND KEY								OVER ALL			
D TOL.	E	ED	F TOL.	GD TOL.	G	Y		AC	L	HD	HA
60.030/60.011	140	130	18/17.957	11.0/10.9	53.0/52.9	M20X40		405	850	550	24

kW	PRODUCT CODE	PRODUCT CODE	PRODUCT CODE
	4 POLE	6 POLE	8 POLE
37	KM2.37T0.BPC.B35.TSS	--	--
18.5	--	--	KM2.18T5.DPC.B35.TSS

NOTES:

- ONE EARTHING TERMINAL IS PROVIDED INSIDE MAIN TERMINAL BOX.
- * 100mm MINIMUM DISTANCE TO BE MAINTAINED FOR EFFICIENT COOLING OF THE MOTOR.
- * TOLERANCES ON MANDATORY DIMENSIONS ARE AS PER IS:1231/IS:2223/IEC:60072

RINGED DIMENSIONS ARE AS PER IS:1231/IS:2223/IEC:60072-1


ALL DIMENSIONS ARE IN mm,

	NAME	DATE	kW	REFER TABLE	FRAME	KM225S
DRAWN	SGS	05/01/2023	POLE	REFER TABLE	MOUNTING	B35 (HORIZONTAL FOOT CUM FLANGE)
CHECKED	SGS	05/01/2023	PRODUCT CODE	REFER TABLE	CUSTOMER	
APPROVED	SSN	05/01/2023	MAX. CABLE SIZE	2RX3CX120MM ²	PO NO	
			PROJECT		CLIENT	



KIRLOSKAR OIL ENGINES LTD.
ELECTRIC MOTORS

DO NOT SCALE
FORMAT NO.:KM-GA-2021 R0

DRAWING NO
KM225SB35TS_4PR0



TERMINAL ARRANGEMENT DRAWING

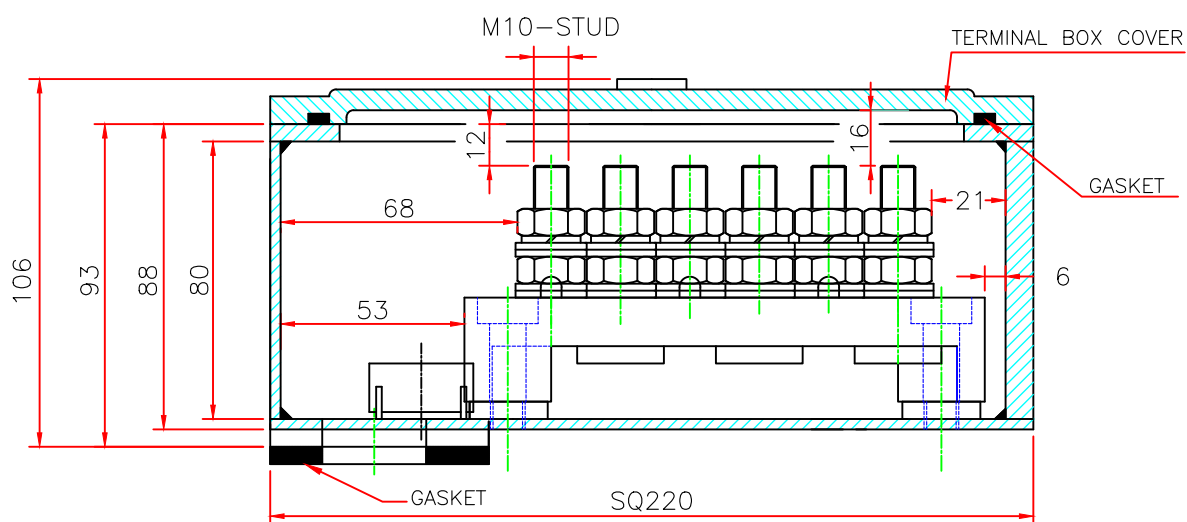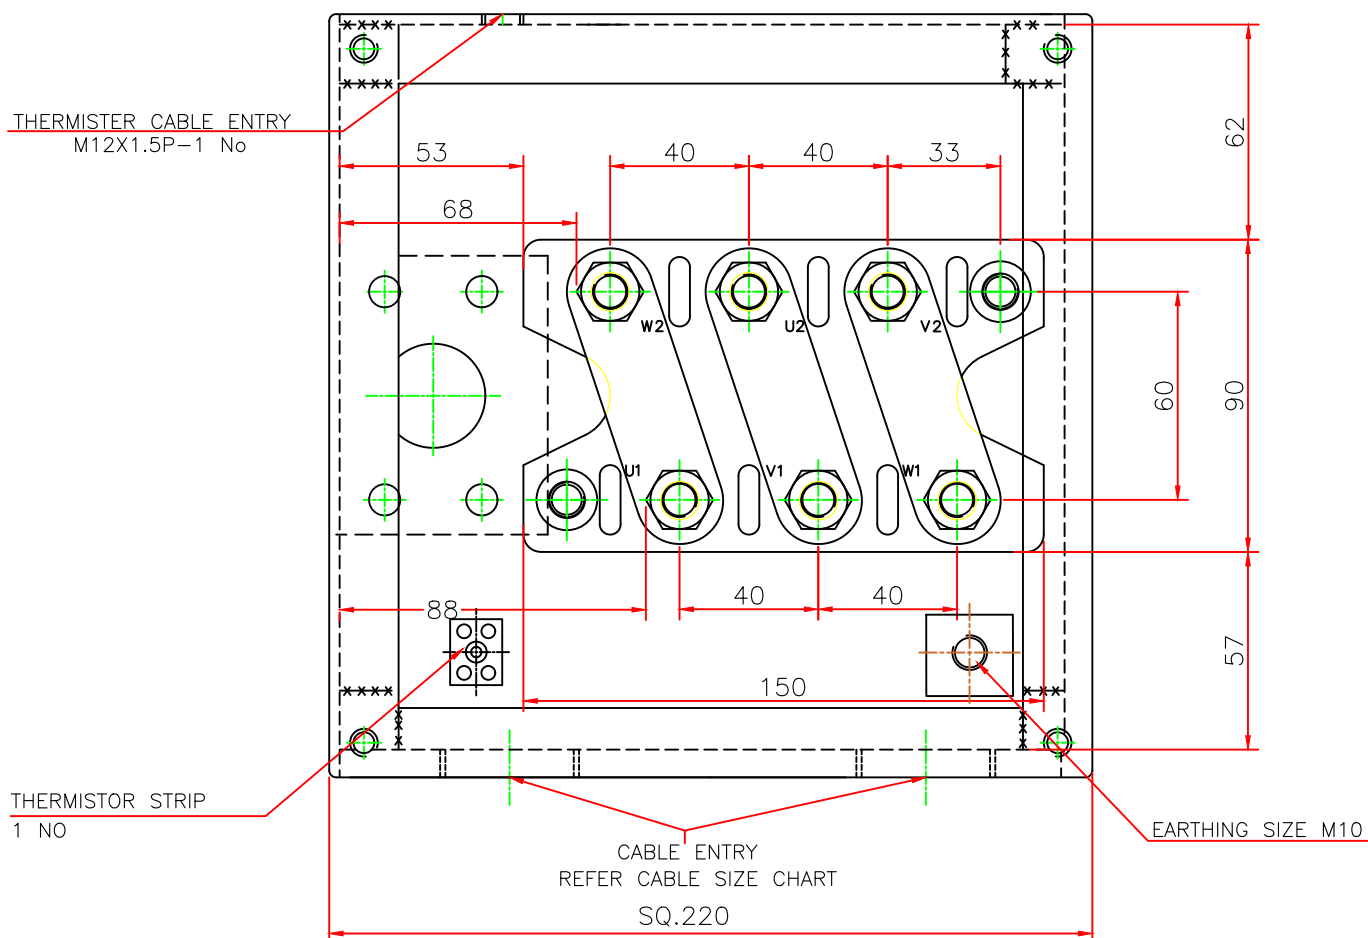

ALL DIMENSIONS ARE IN mm

	NAME	DATE	kW		FRAME	KM225/KM250
DRAWN	SGS	05/01/2023	POLE		CUSTOMER	
CHECKED	SGS	05/01/2023	PRODUCT CODE		PO NO	
APPROVED	SSN	05/01/2023	MAX. CABLE SIZE	2RX3CX120MM ²	CLIENT	
			CABLE ENTRY	M50X1.5P-2NOS.	PROJECT	
KIRLOSKAR OIL ENGINES LTD.				DO NOT SCALE	DRAWING NO	
ELECTRIC MOTORS				FORMAT NO.:KM-TB-2021 R0	KM225TBR0	